

4-72系列离心通风机

4-72 CENTRIFUGAL VENTILATOR



让人工环境更美好 Make the Artificial Environment Better



格瑞德 1993 年建立于山东德州,目前是一家围绕人工环境,横跨新能源、新材料、装备制造、节能环保、信息技术五大战略新型产业的企业集团。格瑞德进行全球化业务运作,产品和服务遍布全国的每一个省市和全球五大洲的 100 多个国家和地区,广泛应用于基建工程、商业地产、工业制造、农业开发、电子信息、车辆工程、环保处理、医药净化、海洋工程、轨道交通等领域,集团也是国家重点军工配套企业。格瑞德从业人员过万人,在山东、贵州、四川、新疆、内蒙等地建有生产基地,在上海、北京、济南、兰州以及美国洛杉矶建有研发中心。

格瑞德致力于让人工环境更美好,通过打造空调工程、通风人防、复合材料、环保工程领域的 全过程解决方案来满足客户需求,格瑞德构建了包括品牌规划、系统设计、技术开发、产品制造、 整体施工、维护服务、检测认证、人才交流、产业集群的全生命周期产业链和产业生态。

创新和变革,格瑞德通过 500 多项专利技术成果的实现和应用,通过商业模式的不断革新和与时俱进,成就了中国机械 500 强和中国新材料企业重点单位的行业地位殊荣。万里路途,不忘初心,时序更替,梦想前行,我们将继续本着"自强不息,厚德载物"的企业精神创建一流企业,实现百年基业。



GRAD Group founded in 1993 in Dezhou, shandong province, that is an enterprise Group focusing on the artificial environment, and spanning five strategic new industries of new energy, new materials, equipment manufacturing, energy conservation and environmental protection, and information technology. GRAD products and services spread around the China and world with 100 countries and regions. They are widely used in infrastructure projects, commercial real estate, industrial manufacturing, agricultural development, electronic information, automobile engineering, medicine, environmental protection treatment, ocean engineering, rail transportation and other fields. GRAD Group is also the key supporting enterprises for national military. With more than 10,000 employees, GRAD Group owned the production bases in Shandong, Guizhou, Sichuan, Xinjiang, Inner Mongolia and so on. And GRAD Group has established r&d centers in Shanghai, Beijing, Jinan, Lanzhou and Los Angeles.

GRAD is committed to make artificial environment better. It can be met customer demand through building all process solution of air conditioning engineering, ventilation civil air defense, composite materials and environmental protection engineering. Grad constructed the whole life cycle industrial chain and industry ecology including brand planning, system design, technology development, product manufacturing, the overall construction and maintenance services, inspection certification, talent exchange and industrial cluster.

Innovation and reform, GRAD gained top 500 China Machine and China's new materials enterprise key units through the realization and application of more than 500 patented technology achievements, through the continuous innovation of business model and keeping pace with the times. Thousands of miles of road, do not forget the original intention, time replacement, dream forward, we will continue to the enterprise spirit with "self-improvement, social commitment" to create a first-class enterprise and achieve a centennial foundation.

让人工环境更美好


Make the Artificial Environment Better

Contents 目录

4-72离心风机	
——、4-72离心风机简介	04
二、4-72离心风机性能参数	05
三、4-72-A 外形及安装尺寸	22
四、4-72-C 外形及安装尺寸	23
五、4-72-D 外形及安装尺寸	24

4-72离心风机

4-72型离心通风机主要用于一般工厂及大型建筑物的室内通风换气,即可用作输入气 体,也可用作输出气体,还可用于锅炉、锻冶炉等的强制通风,输送的气体种类为空气或其 他不自燃、不自爆、无缠绕、对人体无害、对钢铁无腐蚀性之气体。气体内不许有粘性物 质,所含尘土及硬质颗粒物不大于150mg/m³。气体温度不得超过80°C。性能表参数条件: 进口大气压力p=101325pa,进口温度t=20℃,介质密度p=1.2kg/m³。

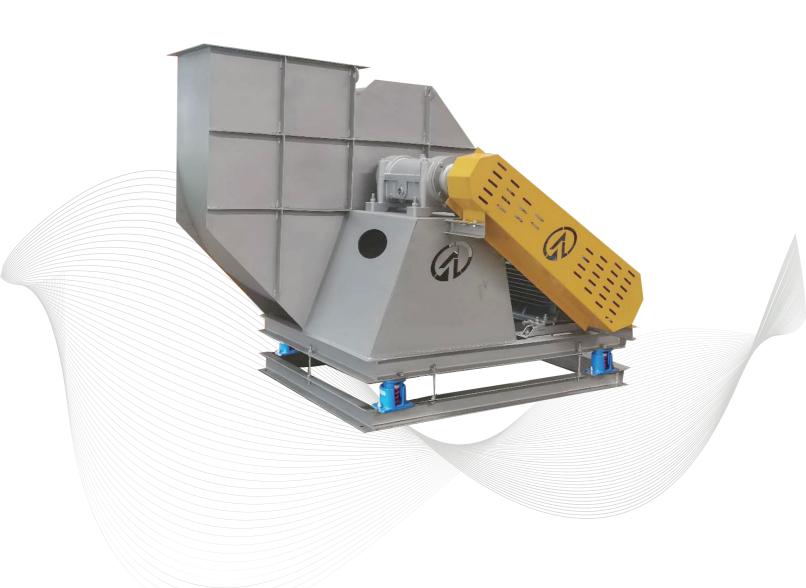

风机性能参数表

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		1131	994	963	69.3	0.45	0.67		
		1310	966	925	73.2	0.48	0.72		
		1480	933	880	75.5	0.51	0.71		
2.0	2900	1659	887	821	76.8	0.53	0.74	VOOC 2	1 E
2.8	2900	1828	835	755	76.9	0.55	0.77	Y90S-2	1.5
		2007	770	673	75.6	0.57	0.79		
		2177	702	588	73.2	0.58	0.81		
		2356	606	473	69.3	0.57	0.80		
		1391	1143	1108	69.3	0.64	0.89		
		1611	1110	1063	73.8	0.67	0.95		1.5
		1820	1072	1012	75.6	0.72	1.0		
	2900	2040	1020	944	77.5	0.75	0.97	Y90S-2	
	2900	2249	959	867	77.3	0.77	1.01	1903-2	1.5
		2469	884	773	76.1	0.80	1.04		
		2678	807	676	73.4	0.82	1.06		
2	3	2898	696	543	69.7	0.80	1.05		
3		696	285	276	69.1	0.08	0.12		1.1
		806	277	265	71.3	0.09	0.12	Y90S-4	
		910	267	252	77.7	0.09	0.14		
	1450	1020	254	235	76.5	0.09	0.14		
	1430	1125	239	216	75.9	0.09	0.14		
		1194	226	200	74.9	0.10	0.15		
		1339	201	168	73.9	0.10	0.15		
		1449	174	136	69.1	0.10	0.15		
		1688	1300	1260	69.3	0.88	1.23		
		1955	1263	1209	73.2	0.93	1.31		
		2209	1220	1151	75.5	0.99	1.38		
	2000	2476	1160	1074	76.8	1.03	1.34	Y90L-2	2.2
	2900	2729	1091	986	76.9	1.07	1.39	190L-2	2.2
		2996	1006	880	75.6	1.10	1.43		
		3250	918	769	73.2	1.13	1.47		
2.2		3517	792	618	69.3	1.11	1.45		
3.2		844	324	314	69.3	0.11	0.16		
		978	315	302	73.2	0.12	0.17		
		1104	304	287	75.5	0.12	0.19		
	1.450	1238	289	267	76.8	0.13	0.19	Y90S-4	1 1
	1450	1365	272	246	76.9	0.13	0.20	1905-4	1.1
		1498	251	219	75.6	0.14	0.21		
		1625	229	192	73.2	0.14	0.21		
		1758	198	154	69.3	0.14	0.21		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		2664	1578	1516	74.2	1.56	2.03		
		3045	1531	1450	77.8	1.65	2.15		
		3405	1481	1379	80.3	1.73	2.25		
	2000	3786	1419	1293	82.1	1.81	2.35	V100L 2	2
	2900	4146	1343	1192	82.6	1.86	2.42	Y100L-2	3
		4527	1256	1076	81.8	1.92	2.50		
		4887	1144	934	79.5	1.95	2.53		
2.6		5268	989	745	74.3	1.94	2.52		
3.6		1332	393	377	74.2	0.20	0.29		
		1522	381	361	77.8	0.21	0.31		
		1703	369	344	80.3	0.22	0.33		
	1450	1893	353	322	82.1	0.23	0.34	Y90S-4	1.1
	1430	2073	335	297	82.6	0.23	0.35	1303-4	1.1
		2263	313	268	81.8	0.24	0.36		
		2444	285	232	79.5	0.24	0.36		
		2634	247	186	74.3	0.24	0.36		
		4012	2014	1921	77	2.89	3.47	Y132S-2	5.5
		4506	1969	1852	80.3	3.05	3.66		
		4973	1915	1772	82.5	3.18	3.82		
	2900	5468	1830	1658	84.1	3.28	3.94		
	2900	5962	1723	1518	84.6	3.35	4.02		
		6457	1606	1366	83.7	3.42	4.11		
		6924	1459	1183	81.4	3.43	4.11		
4		7419	1320	1003	77.5	3.49	4.19		
4		2006	501	478	77	0.36	0.54		
		2253	490	461	80.3	0.38	0.57		
		2487	476	440	82.5	0.40	0.60		
	1450	2734	455	412	84.1	0.41	0.62	Y90S-4	1.1
	1430	2981	429	378	84.6	0.42	0.63	1303-4	1.1
		3228	400	340	83.7	0.43	0.64		
		3462	363	294	81.4	0.43	0.64		
		3700	329	250	77.5	0.44	0.66		
		5712	2554	2437	77	5.21	6.00		
		6416	2497	2349	80.3	5.49	6.32		
		7081	2428	2247	82.5	5.74	6.60		
4.5	2900	7785	2320	2102	84.1	5.92	6.81	Y132S-2	7.5
1.5	2300	8489	2184	1925	84.6	6.04	6.95	11323 2	1.5
		9194	2036	1732	83.7	6.17	7.09		
		9859	1849	1499	81.4	6.17	7.10		
		10562	1673	1271	77.5	6.30	7.24		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用印	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		2856	634	605	77	0.65	0.91		
		3208	620	583	80.3	0.69	0.96		
		3540	603	558	82.5	0.72	1.00		
4.5	1450	3893	577	522	84.1	0.74	1.04	Y90S-4	1.1
4.5	1430	4245	543	478	84.6	0.76	1.06	1303 4	1.1
		4597	506	430	83.7	0.77	1.08		
		4929	460	373	81.4	0.77	1.08		
		5281	416	316	77.5	0.79	1.10		
		7728	3187	3046	77.6	8.72	10.02		
		8855	3145	2960	81.8	9.35	10.76		
		9928	3074	2841	84.7	9.90	11.39		
	2900	11054	2962	2673	86	10.47	12.04	Y160M-2	15
	2300	12128	2792	2445	86.1	10.82	12.44	12001112	10
		13255	2567	2152	84.6	11.07	12.72		
		14328	2335	1850	82.1	11.22	12.90		
5		15455	2019	1455	77.6	11.09	12.75		
J		3864	790	755	77.6	1.09	1.42		
		4427	780	734	81.8	1.17	1.52		2.2
		4964	762	704	84.7	1.24	1.61		
	1450	5527	735	663	86	1.31	1.70	Y100L-4	
	1130	6064	693	606	86.1	1.35	1.76	11002 1	
		6628	637	533	84.6	1.38	1.80		
		7164	580	459	82.1	1.40	1.82		
		7728	502	361	77.6	1.39	1.80		
		10314	2734	2613	77.6	10.00	12.10		
		11818	2698	2539	81.8	10.73	12.98		
		13251	2637	2437	84.7	11.35	13.74		
	2240	14755	2541	2293	86	12.00	13.8	Y160L-4	15
	2240	16187	2396	2098	86.1	12.41	14.30	11001	15
		17692	2202	1845	84.6	12.69	14.59		
		19124	2004	1587	82.1	12.87	14.80		
6		20628	1733	1248	77.6	12.71	14.60		
O		9209	2176	2079	77.6	7.11	8.61		
		10552	2147	2020	81.8	7.64	9.24		
	2000	11831	2099	1940	84.7	8.08	9.78		
		13174	2022	1824	86	8.54	10.34	Y160M-4	11
	2000	14453	1907	1669	86.1	8.83	10.69	I TOOM-4	11
		15796	1753	1469	84.6	9.03	10.93		
		17075	1595	1263	82.1	9.16	11.09		
		18418	1380	994	77.6	9.05	10.95		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		8288	1760	1682	77.6	5.19	6.28		
		9497	1736	1633	81.8	5.57	6.74		
		10648	1697	1568	84.7	5.89	7.13		
	1800	11856	1635	1475	86	6.23	7.16	Y132M-4	7.5
	1000	13008	1542	1349	86.1	6.44	7.40	1132111-4	7.5
		14216	1418	1188	84.6	6.58	7.45		
		15367	1291	1022	82.1	6.68	7.50		
		16576	1116	803	77.6	6.60	7.48		
		7367	1389	1327	77.6	3.64	4.18		
		8442	1370	1289	81.8	3.91	4.49		
		9465	1339	1237	84.7	4.14	4.76		
	1600	10539	1291	1164	86	4.37	5.02	Y132S-4	5.5
	1000	11562	1217	1065	86.1	4.52	5.19	11323-4	5.5
		12637	1119	937	84.6	4.62	5.31		
		13660	1019	806	82.1	4.62	5.31		
		14734	881	634	77.6	4.63	5.32		
		6677	1139	1088	77.6	2.71	3.11		4
		7650	1124	1057	81.8	2.91	3.34		
		8578	1099	1015	84.7	3.08	3.54		
6	1450	9551	1059	955	86	3.26	3.74	Y112M-4	
O	1430	10478	999	874	86.1	3.36	3.86	1112101-4	
		11452	919	770	84.6	3.44	3.95		
		12379	836	661	82.1	3.49	4.00		
		13353	724	521	77.6	3.45	3.96		
		5756	846	808	77.6	1.74	2.38		
		6595	835	785	81.8	1.86	2.55		
		7395	816	754	84.7	1.97	2.49		
	1250	8234	786	709	86	2.09	2.63	Y100L-4	3
	1230	9033	742	649	86.1	2.16	2.72	1100L-4	3
		9873	682	571	84.6	2.20	2.79		
		10672	621	491	82.1	2.34	2.82		
		11511	537	386	77.6	2.21	2.79		
		5157	679	649	77.6	1.25	1.71		
		5909	670	630	81.8	1.34	1.83		
		6626	655	605	84.7	1.42	1.94		
	1120	7378	631	569	86	1.50	2.05	Y100L-4	2.2
	1120	8094	595	520	86.1	1.55	2.12	1100L-4	2.2
		8846	547	458	84.6	1.59	2.17		
		9562	498	394	82.1	1.61	2.20		
		10314	431	310	77.6	1.59	2.17		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用・	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		4605	541	517	77.6	0.89	1.31		
		5276	534	502	81.8	0.95	1.31		
		5916	522	482	84.7	1.01	1.38		
	1000	6587	503	454	86	1.07	1.46	Y100L-4	2.2
	1000	7227	474	415	86.1	1.10	1.51	1100L-4	2.2
		7898	436	365	84.6	1.13	1.54		
		8538	397	314	82.1	1.14	1.57		
		9209	344	247	77.6	1.13	1.55		
		4420	498	476	77.6	0.79	1.12		
		5065	492	463	81.8	0.84	1.21		
		5679	481	444	84.7	0.89	1.28		
	960	6324	463	417	86	0.94	1.35	Y100L-6	1.5
	300	6938	437	382	86.1	0.98	1.39	11001-0	1.5
		7582	402	337	84.6	1.00	1.32		
		8196	366	289	82.1	1.01	1.34		
6		8841	317	228	77.6	1.00	1.33		
U		4144	438	418	77.6	0.65	0.96		1.5
		4749	432	406	81.8	0.70	1.03	Y90L-4	
		5324	422	390	84.7	0.74	1.09		
	900	5928	407	367	86	0.78	1.15		
	300	6504	384	336	86.1	0.80	1.19	1306 4	
		7108	353	295	84.6	0.82	1.21		
		7684	322	255	82.1	0.83	1.23		
		8288	278	200	77.6	0.82	1.22		
		3684	346	331	77.6	0.46	0.72		
		4221	341	321	81.8	0.49	0.72		
		4733	334	308	84.7	0.52	0.76		
	800	5270	322	290	86	0.55	0.81	Y90S-4	1.1
	000	5781	303	265	86.1	0.57	0.83	1305 1	1.1
		6319	279	234	84.6	0.58	0.85		
		6830	254	201	82.1	0.59	0.86		
		7367	220	158	77.6	0.58	0.85		
		14258	2811	2686	77.6	14.27	17.25		
		16337	2772	2608	81.8	15.31	18.52		
	7 1950	18317	2711	2505	84.7	16.19	19.59		
7		20396	2611	2355	86	17.13	20.72	Y180M-2	22
,	1550	22377	2463	2155	86.1	17.70	21.41	1100111 2	
		24455	2265	1897	84.6	18.08	21.91		
		26436	2062	1632	82.1	18.36	20		
		28516	1783	1283	77.6	18.14	21.93		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用・	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		13161	2395	2288	77.6	11.22	13.57		
		15080	2362	2222	81.8	12.04	14.57		
		16908	2310	2134	84.7	12.73	15.41		
	1800	18827	2225	2007	86	13.47	16.30	Y160L-2	18.5
	1000	20656	2099	1837	86.1	13.92	16.84	1100L-2	10.5
		22574	1930	1617	84.6	14.22	17.23		
		24402	1757	1391	82.1	14.44	17.46		
		26322	1519	1093	77.6	14.27	17.25		
		11698	1890	1806	77.6	7.86	9.94		
		13405	1864	1754	81.8	8.45	10.68		
		15030	1822	1683	84.7	8.95	11.30		
	1600	16735	1757	1585	86	9.45	11.95	Y160M-2	15
	1000	18360	1656	1449	86.1	9.77	12.34	1100141-7	13
		20067	1523	1275	84.6	9.99	12.62		
		21691	1387	1098	82.1	10.14	12.8		
		23397	1199	862	77.6	10.01	12.64		
		10603	1550	1481	77.6	5.85	7.18		11
		12148	1530	1439	81.8	6.29	7.69	Y160M-4	
		13621	1495	1381	84.7	6.66	8.15		
7	1450	15167	1441	1300	86	7.05	8.62		
,	1430	16638	1360	1190	86.1	7.26	8.90	1100111 4	
		18185	1250	1047	84.6	7.44	9.10		
		19657	1139	901	82.1	7.54	9.23		
		21204	985	709	77.6	7.45	9.11		
		9140	1151	1100	77.6	3.76	5.14		
		10472	1136	1069	81.8	4.02	5.51		
		11743	1110	1025	84.7	4.26	5.38		
	1250	13075	1070	965	86	4.52	5.68	Y113M-4	7.5
	1230	14344	1010	883	86.1	4.67	5.88	1113111	1.0
		15678	920	769	84.6	4.76	6.03		
		16946	845	668	82.1	5.06	6.10		
		18279	731	526	77.6	4.78	6.03		
		8189	924	883	77.6	2.70	3.70		
		9383	912	858	81.8	2.90	3.96		
		10522	891	823	84.7	3.07	4.19		
	1120	11716	859	775	86	3.24	4.43	Y132S-4	5.5
		12853	810	708	86.1	3.35	4.58	. 1320	0.0
		14047	744	623	84.6	3.44	4.69		
		15184	678	536	82.1	3.48	4.75		
		16378	586	421	77.6	3.44	4.69		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		7312	736	703	77.6	1.92	2.63		
		8378	727	684	81.8	2.05	2.7		
		9394	710	656	84.7	2.1	2.98		
	1000	10460	684	617	86	2.31	3.15	Y112M-4	4
	1000	11476	645	564	86.1	2.38	3.26	1112111-4	7
		12542	593	496	84.6	2.44	3.33		
		13558	540	427	82.1	2.46	3.39		
		14623	468	337	77.6	2.44	3.35		
		7019	678	648	77.6	1.71	2.42		
		8043	670	630	81.8	1.82	2.62		
		9018	654	604	84.7	1.92	2.77		
7	960	10042	630	568	86	2.03	2.91	Y132S-6	3
	300	11017	595	520	86.1	2.12	3.0	11323-0	3
		12040	547	458	84.6	2.16	2.85		
		13015	498	394	82.1	2.18	2.90		
		14038	431	310	77.6	2.16	2.86		
		5338	392	374	86.7	0.76	1.06		2.2
		6116	387	364	88.7	0.82	1.15		
		6857	378	349	89	0.87	1.22		
	730	7636	364	328	88.2	0.92	1.28	Y132S-8	
		8377	316	273	86.6	0.95	1.32		
		9155	288	236	84.2	0.97	1.35		
		10675	250	180	77.6	0.95	1.33		
		19646	3143	3004	77.6	21.85	26.45		
		22511	3101	2918	81.8	23.46	28.39	Y200L-2	30
		25240	3032	2802	84.7	24.83	30.00		
	1800	28105	2920	2635	86	26.25	31.77		
		30834	2754	2411	86.1	27.12	32.83	Y200L-2	37
		33699	2531	2122	84.6	27.74	33.58	12001 2	31
8		36427	2302	1824	82.1	28.13	34.05		
O		17463	2478	2368	77.6	15.35	18.58		
	1600	20010	2445	2301	81.8	16.47	19.94	Y180M-2	22
		22435	2390	2209	84.7	17.44	21.10		
		24982	2303	2078	86	18.43	22.31		
		27408	2171	1900	86.1	19.05	23.06	Y200L-2	30
		29954	1996	1673	84.6	19.49	23.59	1200L-2	
		32380	1816	1438	82.1	19.76	23.92		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用「	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		15826	2032	1942	77.6	11.42	13.41		
		18134	2005	1886	81.8	12.26	14.39		
		20332	1960	1811	84.7	12.98	15.23		
	1450	22640	1888	1703	86	13.72	16.10	Y180M-4	18.5
		24838	1781	1559	86.1	14.18	16.64		
		27146	1638	1372	84.6	14.50	17.02		
		29344	1490	1180	82.1	14.71	17.26		
		13643	1507	1440	77.6	7.32	8.86		
		15633	1487	1399	81.8	7.86	9.51		
		17527	1454	1343	84.7	8.31	10.06		
	1250	19571	1401	1263	86	8.79	10.10	Y160M-4	11
		21412	1321	1156	86.1	9.08	10.44		
		23402	1215	1018	84.6	9.29	10.68		
		25297	1106	875	82.1	9.42	10.83		
		12224	1209	1155	77.6	5.26	6.37		
		14007	1193	1122	81.8	5.65	6.84	Y132M-4	7.5
		15705	1166	1077	84.7	5.98	7.24		
	1120	17487	1124	1014	86	6.32	7.65		11
		19185	1060	927	86.1	6.53	7.91	Y160M-4	
		20968	975	817	84.6	6.68	8.09		
8		22666	887	702	82.1	6.78	8.20		
O		10914	963	920	77.6	3.75	4.73		
		12506	950	894	81.8	4.02	5.08		
		14022	929	858	84.7	4.26	5.38		
	1000	15614	895	807	86	4.50	5.68	Y132M-4	7.5
		17130	844	738	86.1	4.65	5.87		
		18721	777	651	84.6	4.76	5.76		
		20237	707	559	82.1	4.82	5.84		
		10478	887	847	77.6	3.32	4.06		
		12006	875	823	81.8	3.56	4.36		
		13461	856	791	84.7	3.77	4.61		
	960	14989	825	744	86	3.98	4.88	Y132M-6	5.5
		16444	778	681	86.1	4.11	5.04		
		17972	715	599	84.6	4.21	5.15		
		19428	651	515	82.1	4.27	5.23		
		9823	779	744	77.6	2.73	3.45		
	11255	11255	769	723	81.8	2.93	3.70	Y112M-4	4
		12620	752	695	84.7	3.10	3.92		
	900	14052	725	654	86	3.28	4.14		
		15417	683	597	86.1	3.39	4.28	Y132S-4	5.5
		16849	629	527	84.6	3.47	4.38	11323-4	5.5
		18213	572	452	82.1	3.52	4.44		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用「	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		8732	615	588	77.6	1.92	2.42		
		10005	607	571	81.8	2.06	2.60		
		11217	594	549	84.7	2.18	2.75		
	800	12491	572	516	86	2.30	2.91	Y100L-4	3
		13704	540	472	86.1	2.38	3.01		
		14977	496	415	84.6	2.44	3.08		
		16190	452	358	82.1	2.47	3.12		
		7968	512	489	77.6	1.46	1.93		
		9130	506	476	81.8	1.56	2.08		
		10236	494	456	84.7	1.66	2.20		
	730	11398	476	429	86	1.75	2.32	Y132M-8	3
		12504	449	393	86.1	1.81	2.40		
		13666	413	346	84.6	1.85	2.45		
8		14773	376	297	82.1	1.88	2.49		
0		7749	485	463	77.6	1.34	1.54		
		8880	478	450	81.8	1.44	1.65		
		9956	468	432	84.7	1.52	1.74		2.2
	710	11085	450	406	86	1.61	1.85	Y100L-4	
		12162	425	372	86.1	1.66	1.90		
		13292	391	327	84.6	1.70	1.95		
		14368	356	282	82.1	1.73	1.98		
		6876	381	364	77.6	0.94	1.38		
		7879	376	354	81.8	1.01	1.38		
		8834	368	340	84.7	1.06	1.46		
	630	9837	355	320	86	1.13	1.54	Y100L-4	2.2
		10791	334	292	86.1	1.16	1.59		
		11794	308	258	84.6	1.19	1.63		
		12749	280	221	82.1	1.21	1.65		
		29481	2594	2398	86.7	24.21	28.41		
		32095	2559	2327	88.7	25.43	29.84		
	1450	34708	2456	2185	89	26.33	30.9	Y225S-4	37
	1430	36946	2336	2029	88.2	26.91	31.59	12233-4	31
		39121	2205	1861	86.6	27.4	32.15		
9		41265	2051	1668	84.2	27.67	32.47		
3		25415	1922	1777	86.7	15.51	18.21		
		27668	1896	1724	88.7	16.29	19.11		
	1250	29921	1820	1619	89	16.87	19.8	Y180L-4	22
	1230	31850	1732	1504	88.2	17.24	20.23	110UL-4	22
		33725	1635	1379	86.6	17.56	20.6		
		35573	1520	1235	84.2	17.73	20.8		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		22772	1541	1424	86.7	11.16	13.1		
		24790	1520	1382	88.7	11.72	13.75		
	1120	26809	1459	1297	89	12.13	14.24	Y160L-4	15
	1120	28537	1388	1205	88.2	12.4	14.55	1100L-4	13
		30218	1311	1106	86.6	12.62	14.81		
		31873	1219	990	84.2	12.75	14.96		
		19519	1130	1044	86.7	7.03	8.25		
		21249	1115	1013	88.7	7.38	8.66		
	960	22979	1070	951	89	7.64	8.97	Y160L-6	11
	900	24461	1018	883	88.2	7.81	9.17	11000 0	11
		25901	961	810	86.6	8.11	9.52		
		27320	894	726	84.2	8.03	9.42		
		18299	992	917	86.7	5.79	6.8		
		19921	979	890	88.7	6.09	7.14		11
	000	21543	940	836	89	6.29	7.39	Y160M-4	
	900	22932	894	776	88.2	6.44	7.55	TIOONI-4	
		24282	844	711	86.6	6.55	7.69		
9		25613	786	638	84.2	6.61	7.76		
9		16265	783	723	86.7	4.07	4.78		
		17707	773	702	88.7	4.27	5.01		
	800	19149	742	659	89	4.42	5.19	Y132M-4	7.5
	800	20384	706	613	88.2	4.52	5.3	1132111-4	1.5
		21584	667	562	86.6	4.6	5.4		
		22767	620	503	84.2	4.65	5.45		
		14842	652	602	86.7	3.09	3.62		
		16158	643	584	88.7	3.25	3.81		
	730	17473	617	548	89	3.36	3.94	Y160M-8	5.5
	130	18601	587	509	88.2	3.44	4.03	I TOOM-9	5.5
		19695	555	468	86.6	3.50	4.1		
		20774	516	419	84.2	3.53	4.14		
		12809	485	448	86.7	1.98	2.33		
		13944	479	435	88.7	2.08	2.45		
	620	15080	460	409	89	2.16	2.54	V100L 4	2
	630	16052	437	379	88.2	2.21	2.59	Y100L-4	3
		16997	413	348	86.6	2.25	2.64		
		17929	385	313	84.2	2.27	2.66		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		40441	3202	2961	86.7	41.00	48.12		
		44026	3159	2873	88.7	43.07	50.53		
	1.450	47611	3032	2697	89	44.59	52.33	V250M 4	EE
	1450	50680	2884	2505	88.2	45.58	53.49	Y250M-4	55
		53664	2722	2297	86.6	46.40	54.45		
		56605	2532	2059	84.2	46.86	54.98		
		34863	2373	2194	86.7	26.27	31.80		
		37953	2341	2128	88.7	27.59	33.40		
	1250	41044	2247	1998	89	28.57	34.58	V225C 4	37
	1230	43690	2138	1856	88.2	29.20	35.35	Y225S-4	31
		46262	2018	1702	86.6	29.73	35.99		
		48797	1877	1525	84.2	30.02	36.34		
		31237	1902	1758	86.7	18.90	22.87		
		34006	1877	1706	88.7	19.85	24.02		
	1120	36775	1801	1601	89	20.55	24.87	Y200L-4	30
	1120	39146	1714	1488	88.2	21.00	25.43	1200L-4	30
		41451	1618	1364	86.6	21.38	25.89		
		43722	1505	1223	84.2	21.59	26.14		
		27890	1514	1399	86.7	13.45	16.28		18.5
		30363	1494	1358	88.7	14.13	17.10		
10	1000	32835	1434	1275	89	14.63	17.70	Y180M-4	
10	1000	34952	1364	1184	88.2	14.95	18.10		
		37010	1288	1086	86.6	15.22	18.43		
		39038	1199	974	84.2	15.37	18.50		
		26775	1395	1289	86.7	11.90	13.96		
		29148	1376	1251	88.7	12.50	14.67		
	960	31521	1321	1174	89	12.94	15.18	Y200L-6	18.5
	300	33554	1257	1091	88.2	13.23	15.52	12000 0	10.5
		35529	1187	1001	86.6	13.74	15.80		
		37476	1104	897	84.2	13.60	15.96		
		25101	1225	1132	86.7	9.81	11.87		
		27326	1209	1099	88.7	10.31	12.47		
	900	29551	1161	1032	89	10.66	12.91	Y160L-4	15
	300	31457	1104	958	88.2	10.90	13.19	11002 1	13
		33309	1042	878	86.6	11.10	13.43		
		35134	970	788	84.2	11.20	13.56		
		22312	967	894	86.7	6.89	8.34		
		24290	954	867	88.7	7.23	8.76		
	800	26268	916	814	89	7.49	9.07	Y160M-4	11
	000	27961	872	757	88.2	7.65	9.27	120001	11
		29608	823	694	86.6	7.79	9.43		
		31230	766	622	84.2	7.87	9.53		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用	电机	
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw	
		20360	805	744	86.7	5.23	6.14			
		22164	794	721	88.7	5.50	6.45			
	730	23969	762	677	89	5.69	6.68	Y160L-8	7.5	
	130	25516	725	629	88.2	5.82	6.82	1100L-0	1.5	
		27017	685	577	86.6	5.92	6.95			
		28497	637	517	84.2	5.98	7.02			
		19802	761	703	86.7	4.81	5.83			
		21557	751	682	88.7	5.06	6.12			
	710	23313	721	641	89	5.23	6.34	Y132M-4	7.5	
	710	24816	686	595	88.2	5.35	6.48	TISZMIT	1.5	
		26277	648	546	86.6	5.45	6.59			
		27717	603	490	84.2	5.50	6.66			
	10 630	17571	599	553	86.7	3.36	4.25			
		19128	591	537	88.7	3.53	4.46			
10		20686	568	505	89	3.66	4.62	Y132S-4	5.5	
10		22019	540	468	88.2	3.74	4.72	11323-4	5.5	
		23316	510	430	86.6	3.81	4.81			
		24594	475	386	84.2	3.84	4.85			
		15618	473	437	86.7	2.36	2.98			
		17003	467	424	88.7	2.48	3.13	Y112M-4		
	560	18387	448	398	89	2.57	3.24		4	
	300	19573	426	369	88.2	2.63	3.32	1112111 1	'	
		20725	403	340	86.6	2.67	3.38			
		21861	375	304	84.2	2.70	3.41			
		13945	377	348	86.7	1.68	2.30			
		15181	372	338	88.7	1.77	2.42			
	500	16417	357	317	89	1.83	2.50	Y100L-4	3	
		17476	340	295	88.2	1.87	2.56		ŭ	
		18505	321	270	86.6	1.90	2.40			
		19519	299	243	84.2	1.92	2.43			
		53978	2746	2539	86.7	47.02	56.92			
		58763	2710	2464	88.7	49.38	59.78			
	1120	63548	2601	2313	89	51.13	61.90	Y280S-4	75	
		67645	2474	2148	88.2	52.27	63.27			
		71627	2335	1970	86.6	53.21	64.41			
12		75552	2172	1766	84.2	53.73	65.04			
		48195	2185	2020	86.7	33.47	40.51			
		52467	2156	1960	88.7	35.15	42.55	Y225M-4	45	
	1000	56739	2070	1841	89	36.40	44.06			
		60397	1969	1709	88.2	37.20	45.00			
		63953	1859	1568	86.6	37.88	45.85	Y250M-4	55	
		67457	1729	1405	84.2	38.25	49.30			

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用「	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		46267	2013	1861	86.7	29.61	34.75		
		50368	1986	1805	88.7	31.10	36.49		
	960	54469	1906	1695	89	32.20	37.79	Y280S-6	45
	900	57981	1814	1575	88.2	32.91	38.62	12003-0	43
		61359	1712	1444	86.6	33.51	39.32		
		64795	1593	1294	84.2	33.84	39.71		
		43375	1767	1633	86.7	24.40	29.53		
		47220	1744	1585	88.7	25.62	31.02		
	900	51065	1674	1488	89	26.53	32.12	Y250M-6	37
	300	54357	1593	1383	88.2	27.12	32.83	1230141-0	31
		57557	1504	1268	86.6	27.61	33.42		
		60712	1399	1137	84.2	27.88	33.75		
		38556	1395	1289	86.7	17.14	20.74	Y200L-6	22
		41973	1376	1251	88.7	18.00	21.79	12001-0	22
	800	45391	1321	1174	89	18.63	22.56		
	000	48317	1257	1091	88.2	19.05	23.06	Y250M-6	30
		51162	1187	1001	86.6	19.39	23.47	1230141-0	30
		53966	1104	897	84.2	19.58	23.70		
		35182	1160	1072	86.7	13.02	15.28		
		38301	1145	1041	88.7	13.67	16.05		
12	730	41419	1099	977	89	14.16	16.61	Y225S-8	18.5
12	150	44090	1046	908	88.2	14.47	16.98	12255 0	10.5
		46685	987	832	86.6	14.73	17.29		
		49244	919	746	84.2	14.88	17.46		
		34218	1097	1014	86.7	11.98	14.50		
		37251	1083	984	88.7	12.58	15.23		
	710	40284	1040	924	89	13.03	15.77	Y200L-6	18.5
	110	42882	989	858	88.2	13.32	16.12	12000 0	10.5
		45406	934	787	86.6	13.56	16.41		
		47895	869	706	84.2	13.69	16.57		
		30362	863	797	86.7	8.37	10.13		
		33054	852	774	88.7	8.79	10.64		
	630	35745	818	727	89	9.10	11.02	Y180L-6	15
	030	38050	778	675	88.2	9.30	11.26	11002 0	13
		40290	735	619	86.6	9.47	11.46		
		42498	684	555	84.2	9.56	11.58		
		26989	682	630	86.7	5.88	7.11		
		29381	673	612	88.7	6.17	7.47		
	560	31774	646	574	89	6.39	7.74	Y160L-6	11
	500	33822	615	534	88.2	6.53	7.91	TIOULU	11
		35813	580	489	86.6	6.65	8.05		
		37776	540	438	84.2	6.72	8.13		


机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用「	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		24097	543	502	86.7	4.18	5.28		
		26233	536	487	88.7	4.39	5.55		
	500	28369	515	458	89	4.55	5.75	Y160M-6	7.5
	300	30198	490	425	88.2	4.65	5.87	LTOOM-0	1.5
		31976	462	389	86.6	4.73	5.98		
		33728	430	349	84.2	4.78	5.79		
		21687	440	407	86.7	3.05	3.85		
		23610	434	394	88.7	3.20	4.05		
12	450	25532	417	371	89	3.32	4.19	Y132M-6	5.5
12	430	27178	397	344	88.2	3.39	4.28	1132141-0	5.5
		28778	374	315	86.6	3.45	4.36		
		30356	348	282	84.2	3.49	4.40		
		19278	347	321	86.7	2.14	2.46		
		20986	343	312	88.7	2.25	2.58		
	400	22695	329	292	89	2.33	2.67	Y132S-6	3
		24158	313	271	88.2	2.38	2.73	11325-0	3
		25581	296	249	86.6	2.42	2.78		
		26983	275	223	84.2	2.45	2.81		
		73470	2705	2502	86.7	62.7	72.1		
		79982	2670	2427	88.7	65.8	75.7		
	960	86495	2561	2271	89	68.0	78.2	Y315M-6	90
	900	92092	2437	2018	88.2	69.7	80.2	1212101-0	90
		97492	2300	1934	86.6	70.8	81.4		
		102834	2140	1730	84.2	71.7	82.4		
		61225	1877	1736	86.7	36.2	41.7		
		66652	1852	1683	88.7	38.1	43.7	Y280S-6	45
	800	72079	1779	1577	89	39.4	45.0		
	000	76726	1692	1463	88.2	40.3	46.4		
		81243	1597	1343	86.6	40.9	47.1	Y280M-6	55
14		85695	1485	1202	84.2	41.4	47.6		
T -1		49745	1239	1146	86.7	19.4	22.4		
		54155	1223	1111	88.7	20.4	23.5		
	650	58864	1174	1040	89	21.2	24.4	Y250M-8	30
	030	62340	1117	966	88.2	21.6	24.9	12301110	30
		66010	1054	886	86.6	21.9	25.2		
		69627	980	793	84.2	22.2	25.5		
		38265	732	677	86.7	8.8	10.1		
		41657	723	657	88.7	9.3	10.7	Y180L-8	11
	500	45049	695	6164	89	9.6	11.0		
	500	47954	660	570	88.2	9.8	11.3		
		50777	623	523	86.6	10.0	11.5	Y200L-8	15
		53559	580	468	84.2	10.1	11.6		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		30612	468	432	86.7	4.52	5.2		
		33326	463	420	88.7	4.7	5.47		
1./	400	36039	444	393	89	4.9	5.7	V160L 0	7 5
14	400	38363	422	365	88.2	5.0	5.8	Y160L-8	7.5
		40621	400	336	86.6	5.1	5.9		
		42847	371	300	84.2	5.2	6.0		
		102810	3157	2919	86.7	102.81	124.45	Y315L-6	132
		111930	3115	2833	88.7	107.98	130.70	1212F-0	132
	900	121040	2990	2660	89	111.80	135.33		
	900	128840	2844	2470	88.2	114.28	138.33	Y315M-6	160
		136430	2684	2265	86.6	116.35	140.84	121214-0	100
		143910	2497	2030	84.2	117.48	142.20		
		91392	2489	2301	86.7	72.21	87.41		
		99493	2456	2233	88.7	75.84	91.81		
	800	107590	2357	2096	89	78.53	95.06	Y315L-6	110
	000	114530	2242	1947	88.2	80.27	97.16	1212F-0	110
		121270	2117	1786	86.6	81.72	98.92		
		127920	1969	1600	84.2	82.52	99.89		
		81110	1957	1809	86.7	50.48	61.10		
		88300	1931	1755	88.7	53.2	64.18		
	710	95490	1853	1648	89	54.89	66.45	Y315S-6	75
	710	101640	1763	1530	88.2	56.11	67.92	13133-0	13
		107630	1664	1403	86.6	57.12	69.15		
16		113520	1549	1259	84.2	57.68	69.83		
10		71971	1538	1421	86.7	35.27	42.69		
		78351	1518	1380	88.7	37.04	44.84		
	630	84730	1457	1295	89	38.35	46.42	Y280M-6	55
	030	90193	1386	1203	88.2	39.20	47.45	1200141-0	33
		95503	1309	1104	86.6	39.91	48.31		
		100730	1218	989	84.2	40.30	48.78		
		63974	1214	1122	86.7	24.77	29.98		
		69645	1198	1089	88.7	26.01	31.49		
	560	75316	1150	1022	89	26.93	32.60	Y250M-6	37
	500	80172	1094	949	88.2	27.53	33.33	12301110	51
		84892	1033	871	86.6	28.08	33.93		
		89544	961	780	84.2	28.30	34.26		
		57120	967	894	86.7	17.63	21.34		
		62183	954	867	88.7	18.52	22.41		
	500	67246	916	814	89	19.17	23.21	Y225M-6	30
	500	71582	872	757	88.2	19.60	23.72	1223141-0	30
		75796	823	694	86.6	19.95	24.15		
		79950	766	622	84.2	20.15	24.39		

机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		51408	783	723	86.7	12.85	15.56		
		55965	773	702	88.7	13.50	16.34		
	450	60521	742	659	89	13.98	16.92	Y200L-6	18.5
	430	64423	706	613	88.2	14.29	17.29	1200L-0	10.3
		68216	666	561	86.6	14.54	17.61		
		71955	620	503	84.2	14.69	17.78		
		45696	618	571	86.7	9.03	10.93		
		49746	610	554	88.7	9.48	11.48		
	400	53797	586	521	89	9.82	11.88	Y180L-6	15
	400	57265	557	483	88.2	10.03	12.15	11001-0	13
		60637	526	443	86.6	10.21	12.36		
16		63960	490	398	84.2	10.31	12.48		
10		40555	487	450	86.7	6.31	7.64		
		44150	480	435	88.7	6.63	8.02		
	355	47745	461	410	89	6.86	8.31	Y160L-6	11
	333	50823	439	381	88.2	7.01	8.49	1100L-0	11
		53815	414	349	86.6	7.14	8.64		
		56764	386	313	84.2	7.21	8.73		
		35985	383	354	86.7	4.41	5.57		
		39175	378	343	88.7	4.63	5.85		
	315	42365	363	323	89	4.79	5.80	Y160M-6	7.5
	313	45096	345	299	88.2	4.90	5.93	1100141-0	1.5
		47751	326	275	86.6	4.99	6.04		
		50368	303	246	84.2	5.04	6.10		
		158410	3069	2837	86.7	154.04	177.10		
		172460	3029	2755	88.7	161.79	185.15		
	710	186500	2907	2586	89	167.51	192.63	Y355L-8	200
	710	198520	2756	2401	88.2	171.23	196.91	13331-0	200
		210210	2609	2201	86.6	174.33	199.04		
		221730	2427	1973	84.2	176.03	200.00		
		140560	2411	2229	86.7	107.62	130.27		
		153020	2379	2163	88.7	113.03	136.81		
20	630	165480	2284	2031	89	117.03	141.65	Y355M-8	160
20	030	176150	2172	1886	88.2	119.62	144.79	1333141-0	100
		186530	2050	1729	86.6	121.79	147.43		
		196750	1908	1551	84.2	122.98	148.88		
		124950	1902	1758	86.7	75.59	91.5		
		136020	1877	1706	88.7	79.39	96.1		
	560	147100	1801	1601	89	82.20	99.5	Y315L-8	110
	500	156580	1714	1488	88.2	84.02	101.7	13136-0	110
		165800	1618	1364	86.6	85.54	103.54		
		174890	1505	1223	84.2	86.37	104.55		


机号	转速	流量	全压	静压	内效率	内功率	所需功率	配用「	电机
No	r/min	m³/h	Pa	Pa	%	kw	kw	型号	功率 kw
		111560	1514	1399	86.7	53.80	65.13		
		121450	1494	1358	88.7	56.51	68.40		
	F00	131340	1434	1275	89	58.51	70.82	V215M 0	75
	500	139800	1364	1184	88.2	59.80	72.39	Y315M-8	75
		148040	1288	1086	86.6	60.89	73.70		
		156150	1199	974	84.2	61.48	74.42		
		100400	1225	1132	86.7	39.22	47.48		
		109300	1209	1099	88.7	41.19	49.86		
	450	118200	1161	1032	89	42.65	51.63	V215C 0	
	450	125820	1104	958	88.2	43.60	52.77	Y315S-8	55
		133230	1042	878	86.6	44.39	53.73		
		140530	970	788	84.2	44.82	54.25		
		89250	967	894	86.7	27.55	31.68		
		97161	954	867	88.7	28.93	33.26		
	400	105070	916	814	89	29.96	34.45	V2006 0	27
	400	111840	872	757	88.2	30.82	35.44	Y290S-8	37
		118430	823	694	86.6	31.17	36.20		
		124920	766	622	84.2	31.48	36.20		
		79209	761	703	86.7	19.26	23.31		
		86230	751	682	88.7	20.22	24.48		
20	255	93252	721	641	89	20.94	25.35	VAEOMO	20
20	355	99264	686	595	88.2	21.40	25.91	Y250M-8	30
		105100	648	546	86.6	21.79	26.38		
		110860	603	490	84.2	22.00	26.64		
		70284	599	553	86.7	13.45	16.28		
		76514	591	537	88.7	14.13	17.10		
	315	82744	568	505	89	14.63	17.71	Y225M-8	22
	313	88079	540	468	88.2	14.95	18.10	1223141-0	22
		93265	510	430	86.6	15.22	18.43		
		98376	475	386	84.2	15.37	18.61		
		62475	473	437	86.7	9.45	11.44		
		68013	467	424	88.7	9.92	12.01		
	280	73551	448	398	89	10.27	12.44	Y200L-8	15
	200	78293	426	369	88.2	10.50	12.71	1200L-8	13
		82902	403	340	86.6	10.69	12.94		
		87445	375	304	84.2	10.80	13.07		
		55781	377	348	86.7	5.73	8.14		
		60726	372	338	88.7	7.06	8.55		
	250	65670	357	317	89	7.31	8.85	Y180L-8	11
	230	69904	340	295	88.2	7.48	9.06	1100F-0	11
		74020	321	270	86.6	7.61	9.21		
		78076	299	243	84.2	7.68	9.30		

外形与安装尺寸 (A式)

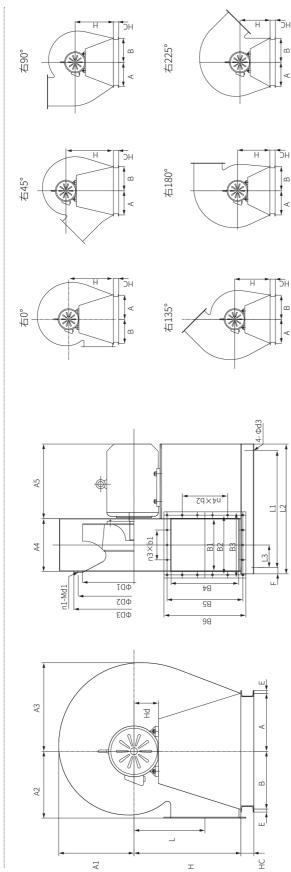


	N4xФb2	3x63	3x72	3×72	0000	0000	4.770	0/X+	47.70	0 1 1	0.0	4x88	1.01	2X&/
	Be N	284	300	316	130		0	280	000			400		240
	B5	256	272	288	320			000	205			430		211
	B4	224 2	240 2	256 2	000			770	030			4004		1480
出风口														
Ħ	п3хФb1	3x55	3x60	3x60	3~70			4x00	02/10			4×70		5/XC
	B3	256	270	284	212			240	37E			4TO		480
	B2	228	242	256	707			210	250			282		422
	B1	196	210	224	757	767	Coc	700	215			320		455
	n2-Φd2	16-Ф7	16-47	16-Ф7	16 07	-	70.00	70-07	70 OC	70-07	70	<i>1</i> 0 −0.7	7.	74-⊕7
	ФD3	340	355	375	115	T.	475	0.14	575	77	0	282	77.	6/9
Ц	ФD2	320	335	355	305	000	V 100	420	00	200	0	000	CL	050
世区日	ФD1	280	300	320	360	200	900	400	AEO	2	0	2000	0	000
	n1-Md1	8-M8	8-M8	8-M8	o Wo	0 100	0 1410	0-IMITO	O M10	OTIMI-0	CLAN CL	TZ-IMITO	0	TZ-MT0
	225°	210	225	235	265	507	700	C67	000	000		3/0		440
	180° 230		245	260	295		325		365		r c	403	0.5	485
I	135°	250	270	285	320		250	222	400	5	L 7 7	044	5	230
	06،	270	290	310	250			200	ACA			480		5/5
	45°	0 290	2 315	4 335	375			0 4TO	0 465			2 270		2 620
	00 0	80 310	0 332	80 354	200			00 443	007			80 223		80 08
	A5 HC	270 8	270 80	295 8 270	330	270		270	410		530	330		330
	A4	201 2	215 2	229 2	3 3			2007	4 100			300		426 3
	A3	268	287	306	245			200	101			φ. Σ		5/2
	A2	187	202	213	220			007	000	667	100	331	700	396
	A1	226	242	258	201			272	696			403		483
_	_	196	210	224	757	707	Coc	700	215		C	920		470
外形及安装尺寸	L3	55.5	62.5	69.5	54	84	28	86	45.5	115.5	33	133		T08
形及安		0 480	5 495	0 510	009	540	705	565	740	009	895	695		00)
祭	3 [1	5 380	5 395	5 410	7			0 400	12 00 00			0 080		2 665
	ФФ3	14.5	14.5	14.5	17 17			14.3	145			J 14.5		J 14.5
	ш	20 50	20 50	20 50	20 50			00 07	00			00 07		05 07
	m	150	160	170	100			, UI2	, 300			7007		310
	∢	165	175	190	210	017	000	720	090	700	700	C97	0,00	340
	PH	90	06	06	100	96	132	96	132		160	100	112	100
	机号	2.8	m	3.2	2	5	-	4	7 1	ţ.	L	n	Ĺ	٥

外形与安装尺寸 (C式)

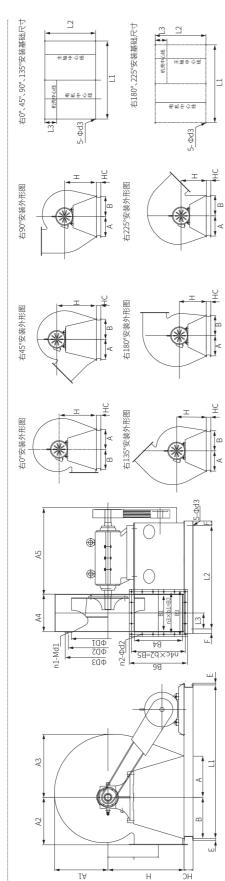

	2											~
	N4xΦb2	4x85	4x97.5	9x30	5x100	6x94	6x1111	7x110	7x125	8x137	9x145	9x168.8
	B6	362	414	476	528	009	704	808	912	1140	1348	1570
	B5	340	390	450	200	564	999	770	875	1096	1305	1520
_	B4	312	364	416	468	520	624	728	832	1040	1248	1456
出风口	п3хФb1	3×70	3x80	3x92	3×102	4x87	4×102	4×118	4x133	4x134	4x132	154x6
	B3	234	264	305	335	386	447	508	570	712	834	974
	B2	210	240	276	306	348	408	472	532	029	792	924
	B1	184	214	245	275	306	367	428	490	612	734	856
	n2-Φd2	14-Ф7	14-Ф7	16-Ф7	16-Ф10	20-Φ10	20-Φ10	22-Φ10	22-Φ10	26-Φ12	30-Ф12	30-Ф15
	ФD3	365	415	485	535	585	685	785	865	1110	1310	1500
п	ФD2	335	395	450	200	260	650	750	860	1070	1270	1450
田図田	ФD1	300	350	400	450	200	009	700	800	1000	1200	1400
	n1-Md1	8-M8	8-M8	8-M10	8-M10	12-M10	12-M10	12-M10	16-M10	16-M12	20-M12	20-M15
	225°	225	260	295	330	370	440	515	585	735	880	1060
	180°	250	290	330	375	415	495	575	099	825	066	1180
I	135°	280	325	370	420	465	555	650	740	925	1110	1350
	.06	315	365	420	470	525	625	730	835	1040	1250	1480
	45°	355	410	470	530	585	700	820	935	1170	1400	1650
	00	388	453	517	582	646	775	904	1032	1290	1548	1820
	H	80	80	80	80	80	80	100	100	140	140	140
	A5	470	470	625	625	625	625	850	850	1100	1100	1230
	A4	189	219	251	281	312	373	437	499	621	744	868
	A3	312	364	417	468	520	623	727	830	1038	1245	1490
	A2	225	263	300	338	375	450	525	009	750	900	1050
_	Α1	247	288	330	370	412	493	575	657	820	984	1160
外形及安装尺寸	_	230	268	307	345	383	9 460	537	613	292	920	1073
%及安	n	49.5	64.5	80.5	95.5	111	141.5	173.5	204.5	265.5	327	409
外	7	420	450	585	615	645	710	940	1000	1330	1455	1820
	⊒	710	810	096	1010	1160	1310	1410	1710	1850	2250	2650
	ФФ3	14.5	14.5	14.5	14.5	14.5	14.5	18.5	18.5	18.5	18.5	18.5
	ш	20 50	20 50	20 50	20 50	20 50	20 50	20 50	20 50	25 50	25 50	25 50
	В	160 20	185 20	210 20	235 20	260 20	310 20	365 20	415 20	515 2	615 2	720 2
	⋖	190	220	250	280	310	370	435	495	615	735 (820
	机吊	m	3.5	4	4.5	2	9	7	∞	10	12	14

外形与安装尺寸 (D式)

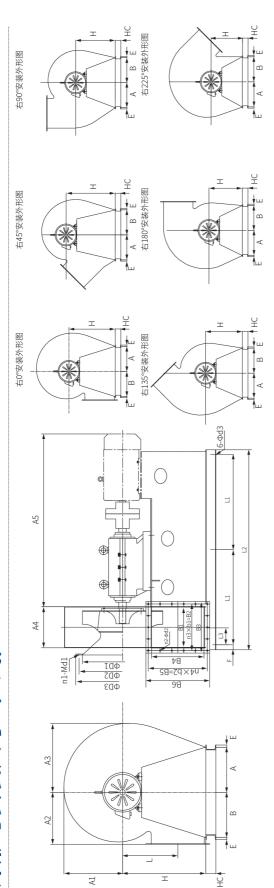

	N4xФb2	4x85	4x97.5	5x90	5x100	6x94	6x111	7×110	7x125	8x137	9x145	9x168.8
	B6	362	414	476	528	009	704	808	912	1140	1348	1570
	B5	340	390	450	200	564	999	770	875	1096	1305	1520
	B4	312	364	416	468	520	624	728	832	1040	1248	1456
出风口	п3хФb1	3×70	3x80	3x92	3×102	4x87	4×102	4x118	4x133	4x134	4x132	154x6
	B3	234	264	305	335	386	447	208	570	712	834	974
	B2	210	240	276	306	348	408	472	532	029	792	924
	B1	184	214	245	275	306	367	428	490	612	734	856
	n2-Φd2	14-Ф7	14-Ф7	16-Ф7	16-Ф10	20-Φ10	20-Φ10	22-Φ10	22-Ф10	26-Φ12	30-Ф12	30-Ф15
	ФD3	365	415	485	535	585	685	785	885	1110	1310	1500
┇	ФD2	335	395	450	200	260	650	750	860	1070	1270	1450
田区田	ФD1	300	350	400	450	200	009	700	800	1000	1200	1400
	n1-Md1	8-M8	8-M8	8-M10	8-M10	12-M10	12-M10	12-M10	16-M10	16-M12	20-M12	20-M15
	225°	225	260	295	330	370	440	515	585	735	880	1060
	180°	250	290	330	375	415	495	575	099	825	066	1180
Ŧ	135°	280	325	370	420	465	555	029	740	925	1110	1350
	06	315	365	420	470	525	625	730	835	1040	1250	1480
	45°	355	410	470	530	585	700	820	935	1170	1400	1820 1650
	0	388	453	517	582	646	775	904	1032	1290	1548	
	H	80	80	08 (08 (98	80	001 (001 (140	140	140
	A5	720	790	1000	1000	1125	925	1330	1400	1900	1970	2200
	A4	189	219	251	281	312	373	437	499	8 621	744	898 (
	A3	312	364	417	468	520	623	727	830	1038	1245	1490
	A2	225	263	300	338	375	450	525	009	750	006	1050
to	Al	247	288	330	370	412	493	575	657	820	984	3 1500
外形及安装尺寸	_	230	268	307	345	383	5 460	5 537	5 613	5 767	920	1073
形及安	23	49.5	64.5	80.5	95.5	111	141.5	173.5	204.5	265.5	327	409
*	7	870	950	1150	1180	1320	1280	1660	1800) 2380) 2500	3060
	=======================================	385	425	525	540	610	290	2 780	850	1140	1200	1480
	ФФЗ) 14.5	0 14.5) 14.5	0 14.5	0 14.5	0 14.5) 18.5	0 18.5) 18.5) 18.5) 18.5
	Ш	20 50	20 50	20 50	20 50	20 50	20 50	20 50	20 50	25 50	25 50	25 50
	В	160 2	185 2	210 2	235 2	260 2	310 2	365	415 2	515	615 2	720
	< nlp	190	220	250	280	310	370	435	495	615	735	820
	机号	m	3.5	4	4.5	2	9	7	∞	10	12	14

Marketing Network 营销网络

西南区

云南分公司

电话: 0871-67188268 传真: 0871-67188268

昆明市官渡区广福路海伦国际城市广场二座2209-2210室

四川分公司

电话: 028-86285041/86285141

传真: 028-87619566

四川省成都市金牛区金府路799号金府国际1栋2707

重庆二级服务处 电话: 023-6786<u>1693</u> 传真: 023-67861693

重庆市江北区北城天街15号富力海洋广场2栋505室

广西分公司

电话: 0771-5<u>3459</u>19 传真: 0771-5345919

南宁市青秀区民族大道166号阳光100上东国际T3-1701、1702

贵州分公司

电话: 0851-84135728 传真: 0851-84135728

贵州省贵阳市观山湖区都匀路天一国际广场3栋19层2室

东南区

江苏分公司

电话: 025-86517817 传真: 025-86517817

江苏省南京市江宁区董村路39号天琪科技大厦1栋801室

电话: 0591-87803781 传真: 0591-87803781

福建省福州市鼓楼区华林路246号鸿源天城B座11层604室

电话: 0551-64262334 传真: 0551-64262334

合肥市蜀山区潜山路与佛子岭路交叉口绿地.蓝海国际大厦B座510室

电话: 027-88613519 传真: 027-88613519

湖北省武汉市武昌区徐东大街3号君临天下A栋904

长沙二级服务处 电话: 15505347231

湖南省长沙市天心区芙蓉中路二段同发大酒店14A

徐州二级服务处

电话: 0516-83865818 传真: 0516-83865818

徐州市云龙区庆丰路绿地城市广场LOft1-707室

华北区

济南分公司

电话: 0531-88031918 传真: 0531-88031918

济南市历下区颖秀路2766号高层次人才新药研发基地320室

潍坊分公司

电话: 0536-8653160/8291160

传真: 0536-8871960

潍坊市奎文区东风东街与金马路交叉口天马大厦11楼1104室

青岛分公司

电话: 0532-85849938 传真: 0532-88785267

青岛市市北区徐州路176号中锦大厦1805室

山西分公司

电话: 0351-2712522 传真: 0351-2712533

山西省太原市亲贤北街215号怡和国际广场912室

石家庄分公司 电话: 0311-85860292 传真: 0311-85860293

河北省石家庄市新华区维明大街与宁安路交叉口商务办公楼6层

河南分公司

电话: 0371-60178178 传真: 0371-60178179

郑州市管城区航海路未来路交叉口启航大厦E座1118室

临沂二级服务处 电话: 15505345334

临沂市兰山区聚才路与滨河路交汇处水岸华庭3号楼1202室

保定二级服务处 电话: 15505345791

河北省保定市莲池区五四东路金顶宝座A座3103

烟台二级服务处 电话: 1<u>5505</u>3451<u>72</u>

山东省烟台市芝罘区南尧新都汇27号楼2单元1903室

临汾二级服务处 临汾市尧都区裕景花园A座

电话: 15505345192



安阳二级服务处 电话: 15505345485

安阳市文峰区福佳斯国际花园西区9栋303

济宁二级服务处 电话: 15505345781

济宁市任城区古槐路与机电一路交叉口人文嘉园

3号楼1单元402室

京津唐区

北京分公司

电话: 010-63331330/63331215

北京市丰台区马家堡西路15号时代风帆大厦1区801、802

天津分公司

电话: 022-28055173 传真: 022-28055172

天津市河西区洞庭路与东江道交口香年广场B座907室

唐山分公司

电话: 0315-2229927 传真: 0315-2229927

河北省唐山市路北区鹭港小区204-2-901

内蒙古分公司

电话: 0471-6504381 传真: 0471-650<u>4382</u>

呼和浩特市新城区兴安北路财富公馆55号1901室/2001室

廊坊二级服务处 电话: 0316-2609984 传真: 0316-5943388

河北省廊坊市安次区银河南路K2狮子城N1座1单元2505室

承德二级服务处 电话: 15505345067

河北省承德市双桥区凤凰御庭3号楼2单元1604室

秦皇岛二级服务处 电话: 155053401<u>0</u>9

秦皇岛海港区长江西道公富庄家园16栋

张家口二级服务处 电话: 15505345033

张家口市经开区凤凰城小区1号楼1单元701室

东北区

吉林分公司

电话: 0431-81157470/81157460

长春市南关区长春大街1599号永长小区1栋2门3楼

辽宁分公司

电话: 024-23243908 传真: 024-23243908

沈阳市浑南新区天赐街5-1号国贸中心A座1203室

黑龙江公司

电话: 0451-51523896 传真: 0451-51523896

哈尔滨市南岗区哈西金爵万象三期一号楼813-814室

锦州二级服务处 电话: 15505345182 <u>锦州市太和区永和</u>国际4-67

西北区

陕西分公司

电话: 029-88629529 传真: 029-88647844

陕西省西安市莲湖区大庆路蔚蓝国际A座910

宁夏分公司

电话: 0951-6839809 传真: 0951-6839809

银川市金凤区黄河东路金地花园D区10号楼1单元102

甘肃分公司

电话: 0931-4524247 传真: 0931-4524247

兰州市城关区天水北路828号良志兰州之窗A座22层2201室

新疆分公司

电话: 0991-4327370

新疆乌鲁木齐市新市区鲤鱼山路山水华庭20-1-701室

青海分公司

电话: 0971 - 8266658 传真: 0971 - 8266658

青海省西宁市城中区南小街奥运世纪花园68号





山东格瑞德集团 SHANDONG GRAD GROUP

集团地址: 山东省德州市天衢工业园格瑞德路 6 号销售热线: 0534-2730888 全国统一客服热线: 400-618-5015

Add:No.6, Grad Road, Tianqu Industrial Park, Dezhou, Shandong, China

Tel:0086-534-2730888

National Service Hotline:400-618-5015

T.E.:0086-534-2730800 Fax:0086-534-2730777

Web:http://en.gradgroup.com E-mail:grad@gradgroup.com

Shandong Grad Ventilation Engineering Company II